BURROW

PORCELAIN TILE

MADE IN USA

herоflooring.com

HERO FLOORING

BURROW
PORCELAIN TILE

COLORS:

Ice

Ash

Sand

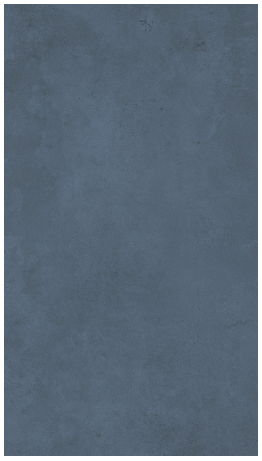
Seaweed

Black

DECOS:

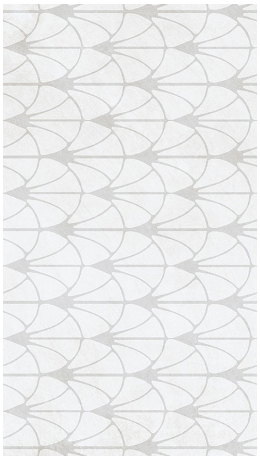
Ice Deco

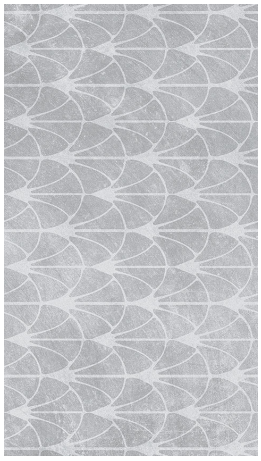
Ash Deco

Sand Deco

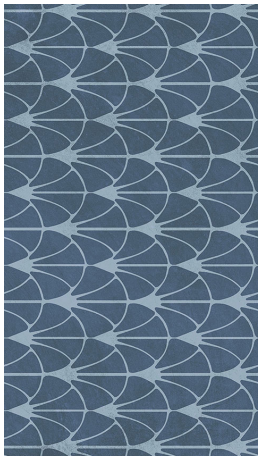
Seaweed Deco

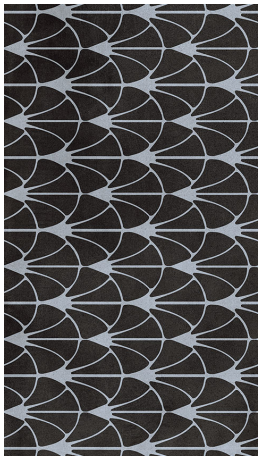
Black Deco

BURROW
PORCELAIN TILE

MOSAICS:

4”x4”

Ice

Ash

Sand


Seaweed

Black

2”x12”

Ice

Ash

Sand

Seaweed

Black

2”x2”

Ice

Ash

Sand


Seaweed

Black

BURROW
PORCELAIN TILE

SIZES:

24”x48”
Honed/Textured

12”x24”
Honed/Textured

12”x24”
Deco Honed/Textured

MOSAIC AND TRIM SIZES:

4”x4” on 12”x12” Sheet
Mosaic Honed/Textured



3”x24” Bullnose
Honed

2”x2” on 12”x12” Sheet
Mosaic Honed



6”x12” Covebase
Honed

2”x12” on 12”x12” Sheet
Mosaic Honed



TECHNICAL INFORMATION:

SPECS	ASTM TEST	INDUSTRY STANDARD	HERO VALUES
WATER ABSORPTION	C373	Impervious < 0.5%	≤ 0.1%
THICKNESS DIMENSION	C499	Range ± 0.04 Inc. Max.	≤ ± 0.04 Inc.
FACIAL DIMENSION	C499	± 0.25 %	≤ ± 0.25%
WARPAGE AVERAGE DIAGONAL	C485	± 0.40 %	≤ ± 0.40%
WARPAGE AVERAGE EDGE	C485	± 0.40 %	≤ ± 0.40%
WEDGING	C502	± 0.25 %	≤ ± 0.25%
BOND STRENGTH	C482	≥ 50 psi	≥ 200 psi
BREAKING STRENGTH	C648	≥ 250 lb	≥ 400 lb
HARDNESS (MOHS)	Scratch Test (No regulated)	Range 0 – 10	≥ 7
VISIBLE ABRASION RESISTANCE FOR GLAZE TILES	C1027	No Requirement, Range 0 – 5	Class 4
FROST RESISTANCE	C1026	No sample must show alterations to surface	No evidence of Damage
CHEMICAL RESISTANCE	C650	No Requirement, Range E – A	Class A
STAIN RESISTANCE	C1378	No Requirement, Range E – A	Class A*
DCOF HONED FINISH	BOT 3000	≥ 0.42	≥ 0.45
DCOF TXT FINISH	BOT 3000	≥ 0.42	≥ 0.65
AESTHETIC CLASSIFICATION	Visual Evaluation Shade & Textures	No Requirement, Range V0 – V4	V3

*All values given are for matte or honed material. No values are given for Polished material. The above information is a subject to change.

BURROW
PORCELAIN TILE