## FACETS PORCELAIN TILE



heroflooring.com

## FACETS PORCELAIN TILE



## COLORS:



Carbon 12x24 in. Matte/Polished



2x2 in. Basketweave Mosaic Matte



Random Strip Mosaic Matte



3x12 Bullnose Matte/Polished



lce 12x24 in. Matte/Polished



Sand 12x24 in. Matte/Polished



Clay 12x24 in. Matte/Polished



2x2 in. Basketweave Mosaic Matte



2x2 in. Basketweave Mosaic Matte



Random Strip Mosaic Matte

Random Strip Mosaic

Matte



3x12 Bullnose Matte/Polished



3x12 Bullnose Matte/Polished



3x12 Bullnose Matte/Polished



2x2 in. Basketweave Mosaic Matte




Random Strip Mosaic Matte



## **TECHNICAL INFORMATION:**

SPECS	TEST	HERO VALUES
WATER ABSORPTION	ANSI / ISO - (%)	< 0.5%
ABRASION RESISTANCE	ANSI / ISO	CLASS 4
SCRATCH HARDNESS	ANSI / ISO - (Mohs)	MATTE 7 POLISHED 6
BREAKING STRENGTH	ANSI - (Ibf) ISO - (N)	≥300 >1300
SLIP RESISTANCE	ANSI - DCOF (WET) ISO - R VALUE	MATTE ≥0.50 POLISHED <0.42 MATTE R(-) POLISHED R (-)
CHEMICAL RESISTANCE	ANSI / ISO	MATTE CLASS A POLISHED CLASS B
STAIN RESISTANCE	ANSI / ISO	Matte Class APolished Class BMatte Class 5Polished Class 4
FROST RESISTANCE	ANSI / ISO	PASS

Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group. Variances in test values can occur in different production

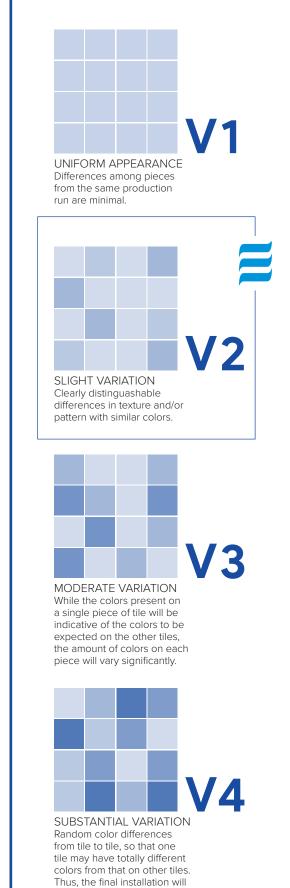

be unique.







www.heroflooring.com