



65% NIKE GRIND, 35% EPDM



## COLORS:




Chicago




Miami



NYC

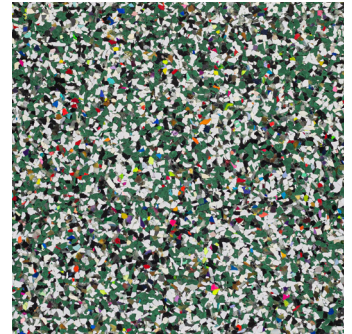


Philadelphia

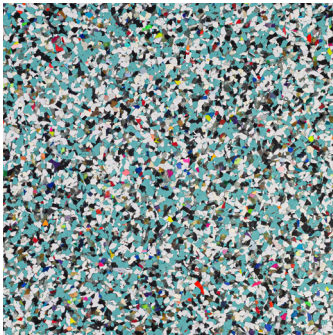


Charlotte



Orlando

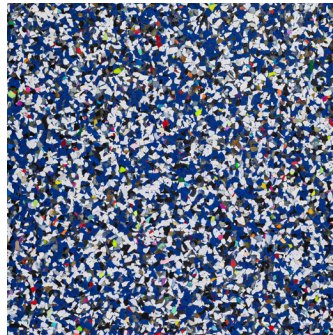


Houston

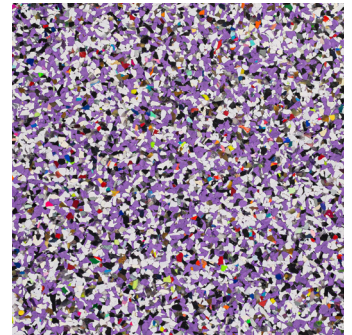


San Francisco




Nashville

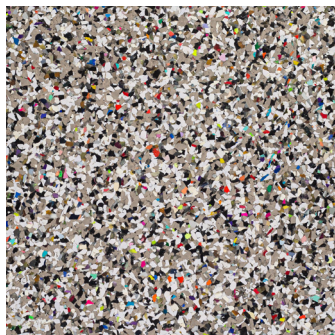

Los Angeles

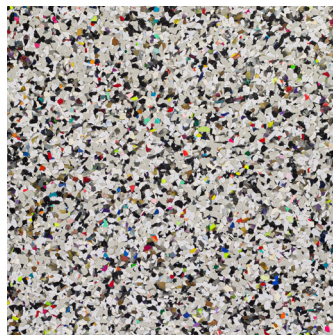

Portland

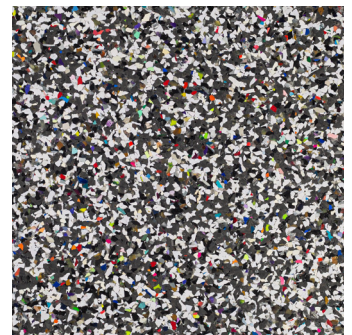

Las Vegas


## SIZES:

4mm-19mm Thickness

24x24, 24x36, 38x38, 48x72 in.  
Square



24x24, 24x36, 37x37, 47.75x71.63 in.  
Interlocking

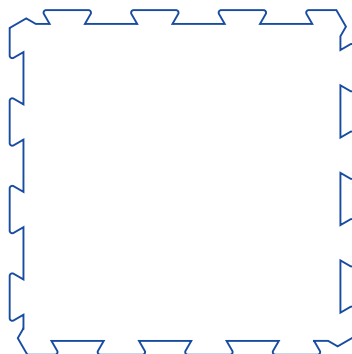

## TECHNICAL INFORMATION:

SPECS	TEST METHOD	HERO VALUES
SOUND ABSORPTION/NOISE REDUCTION COEFFICIENT	ASTM C423	SAA - 0.04 NRC - 0.05
TABER ABRASION	ASTM C501	Weight Loss 0.92 grams (1.39%)
COMPRESSION SET UNDER FORCE	ASTM D395B	82.2% Recovered; 17.8% Unrecovered
BREAKING LOAD AND ELONGATION	ASTM D412	Elongation - 48.71% Tensile - 204.4 lbs/sq. in.
STATIC COEFFICIENT OF FRICTION	ASTM D2047	Dry 0.78
HARDNESS SHORE A DUROMETER	ASTM D2240	65
IMPACT SOUND TRANSMISSION	ASTM E492	IIC 58
CRITICAL RADIANT FLUX	ASTM E648	0.48 watts/square cm
FLEXIBILITY	ASTM F137	6mm Mandrel PASS
ELECTRICAL RESISTANCE - SURFACE TO GROUND	ASTM F150	$4.0 \times 10^{10}$ ohms (average)
ELECTRICAL RESISTANCE - SURFACE TO SURFACE	ASTM F150	$2.8 \times 10^{11}$ ohms (average)
RESISTANCE TO CHEMICALS (5 MIN & 24 HR)	ASTM F925	Slight to Moderate Color Change from 5% Acetic Acid, Mineral Oil, 5% Phenol, Kerosene and Olive Oil
STATIC LOAD (250 LBS)	ASTM F970	0.009 inch residual compression
SHORT TERM INDENTATION (140 LBS)	ASTM F1914	-0.064 inch residual indentation