



STORYBOOK

WALL TILE




MADE IN USA

heroflooring.com

HERO
FLOORING

NEUTRAL



White



Calm



Balance



Black



Matte White



Matte Calm



Matte Balance



Matte Black

NEUTRAL+



Stable



Dependable



Storm



Shadow



Matte Stable



Matte Dependable



Matte Storm



Matte Shadow

VIBRANT*



Scarlet



Passion



Blaze



Wisdom



Navy



Sapphire



Devotion



Lemon

VIBRANT+*



Tranquility



Fresh




Mandarin




Green Apple



Peacock



Restore



Blush



Grace

*Vibrant available in glossy finish only.

SIZE:

8"x24" Wall Tile
3/8" Thickness



4"x16" Wall Tile
3/8" Thickness



4"x12" Wall Tile
5/16" Thickness



2"x8" Wall Tile
5/16" Thickness



3"x6" Wall Tile
5/16" Thickness



6"x6" Wall Tile
5/16" Thickness




4"x4" Wall Tile
5/16" Thickness



APPLICATIONS:

| | TARGET DCOF WET | SUITABLE |
|--|--------------------|----------|
| Dry & Level - Interior Floor | N/A | |
| Wet & Level - Interior Floor | ≥ 0.42 | |
| Shower Floors (Residential or Light Commercial) | ≥ 0.42 | |
| Exterior Floor Applications (including pool decking & other wet areas with minimal footwear) | ≥ 0.60 | |
| Ramps & Inclines | ≥ 0.65 | |
| Walls/Backsplashes | N/A | • |
| Countertops | N/A | • |
| Pool Linings | N/A | • |

TECHNICAL INFORMATION:

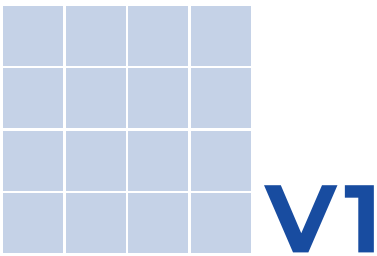

UNIFORM APPEARANCE

Differences among pieces from the same production run are minimal.

| SPECS | ASTM # | HERO VALUES |
|---------------------|--------|----------------|
| Water Absorption | C373 | < 20.0% |
| Breaking Strength | C648 | 120 - 230 lbs. |
| Scratch Hardness | MOHS | 4.0 - 6.0 |
| Chemical Resistance | C650 | Resistant |
| Abrasion Resistance | C1027 | N/A |

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3.