

ROOSEVELT

WALL TILE



COLORS:



Glare



Candle



Wing



Levity



Manor



Plume



Chimney



Spice




Verve




Ink

DECO:

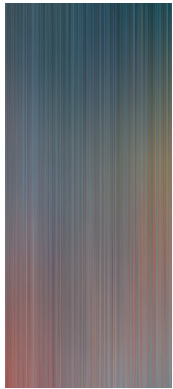

Reed

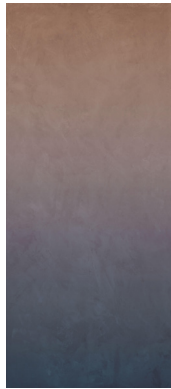

Dusk Spice



Dusk Verve



Hoop A

Hoop B

FINISH:

MATTE RECTIFIED
MATTE (R10 A+B) RECTIFIED
GRAPH RECTIFIED
TEXTURED RECTIFIED

THICKNESS:

6mm
9mm
20mm

TRIM:

3"x24" Bullnose
13"x48" Stair Tread
13"x24" Stair Tread
13"x13" Stair Tread Corner

SIZES:

48"x110"



48"x48"



32"x32"



24"x48"



24"x24"



12"x24"



5"x24"



TECHNICAL INFORMATION:

SPECS	TEST	HERO VALUES			
		MATTE		RECTIFIED	
Size	ISO 10545-2	In accordance		In accordance	
Water absorption*	ISO 10545-3	≤ 0.1%		≤ 0.1%	
Bending strength*	ISO 10545-4	In accordance		Not applicable to tiles with a breaking strength	
Breaking strength	ISO 10545-4	Sps ≥ 7.5 mm S ≥ 1300 N		> 10.000 N	
Deep scratch resistance*	ISO 10545-6	In accordance		In accordance	
Thermal linear expansion coefficient*	ISO 10545-8	≈ 7 (10-6 °C-1)		≈ 7 (10-6 °C-1)	
Thermal shock resistance*	ISO 10545-9	Resistant		Resistant	
Expansion in humidity*	ISO 10545-10	≤ 0.1 (mm/m)		≤ 0.1 (mm/m)	
Frost resistance*	ISO 10545-12	Resistant		Resistant	
Chemical resistance*	ISO 10545-13	Resistant		Cleanable	
Static load	EN 12825			60x60	
				Center	KN>7,0
				Side Center	KN>5,0
				Diagonal	KN>8,0
Breaking load class***	EN 1339			U11 ***	
				T11 ***	
Resistance to stains*	ISO 10545-14	Cleanable		Cleanable	
Slip resistance**	DIN 51130	R9 MATT 120X278	R10 B MATT	— SOFT	R11 C
	ANSI A326.3^	WET DCOF ≥0.42	WET DCOF ≥0.42	WET DCOF ≥0.42	WET DCOF ≥0.55
Nominal Thickness		120X278	6mm		20mm
		30X60 NR	8mm		
		120X120, 80x80, 60X120, 60X60, 30X60, 11,7X60	9mm		

* Average values referred to the last two years of production.

** As far as values relating to the matet finish of the product and to tests carried out by certified external laboratories whose results are available upon request at the office, we are willing to check the lot you are interested in purchasing

* For domestic chemicals and swimming pool additives.

^ Wet DCOF specific values available at the company.