




VIVA LA VIDA

PORCELAIN TILE


COLORS:

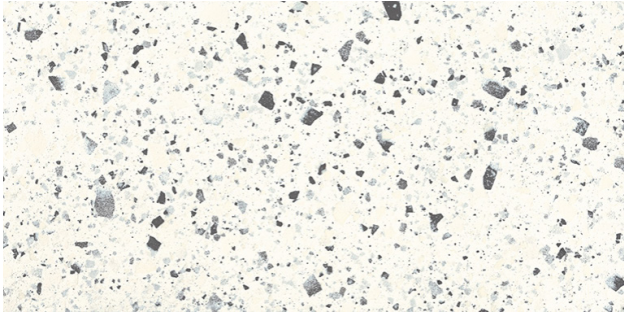

White




Zinc

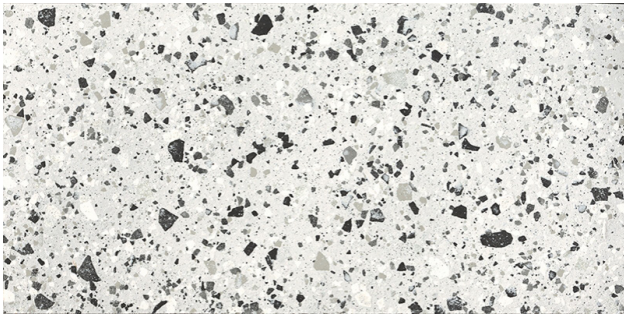


Silver




Ivory

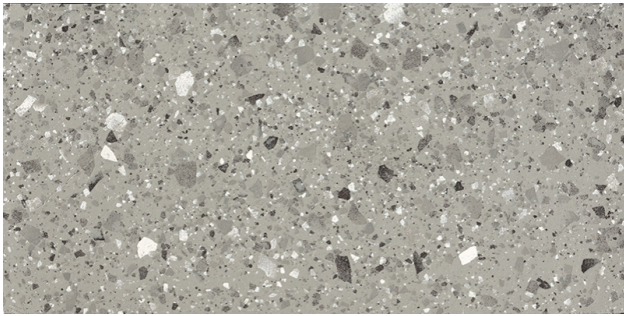


Grey

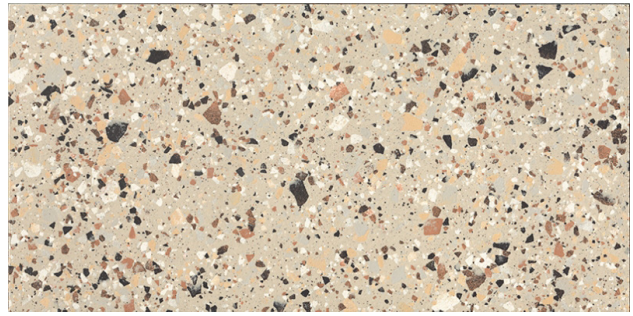

Beige

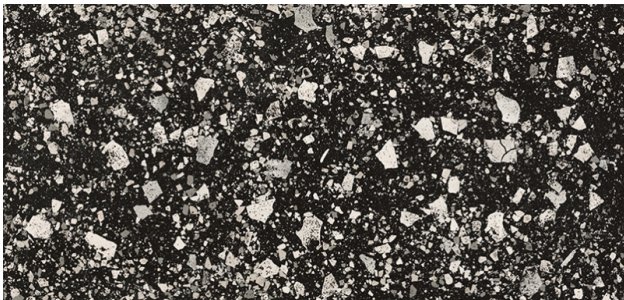


Graphite

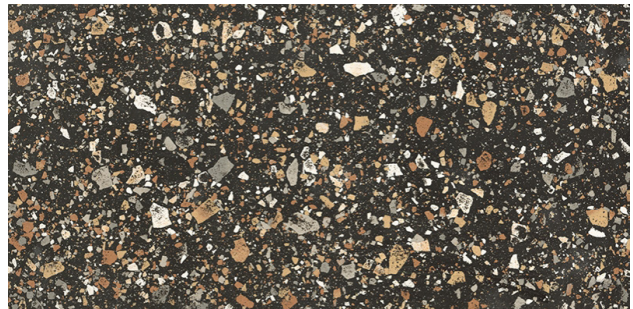


Earth


COLORS:

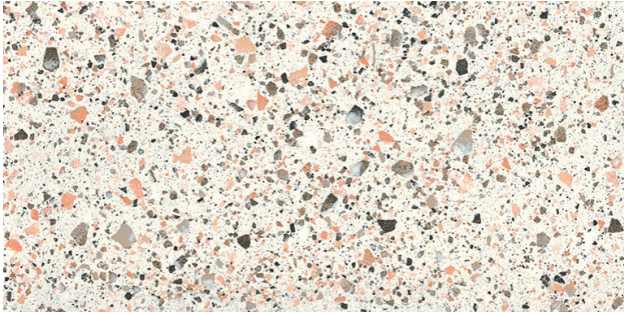


Pink

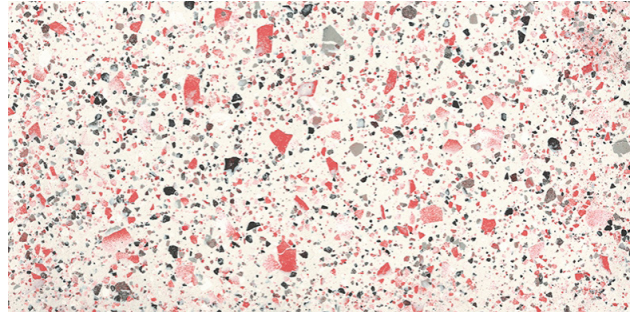


Coral

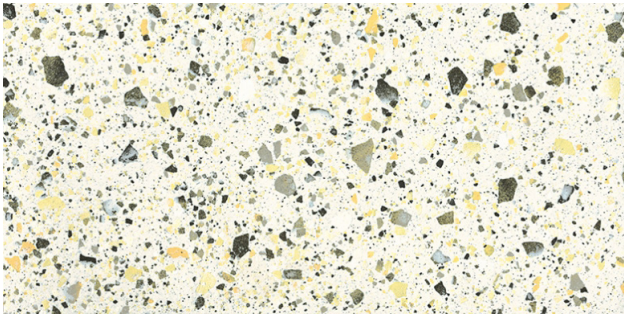

Yellow

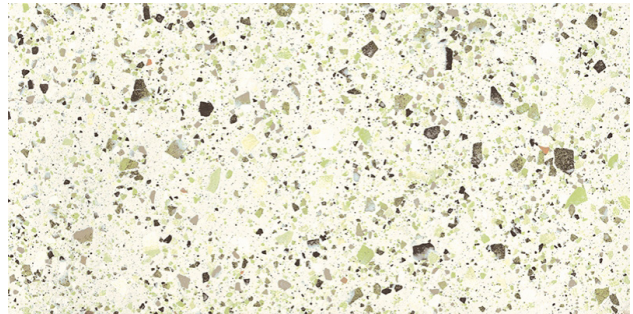

Green

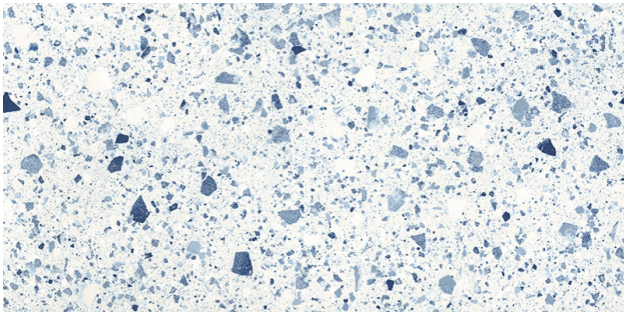

Blue

SIZES:

48"x24"
Matte/Polished



24"x24"
Matte/Polished



TECHNICAL INFORMATION:

SPECS	ASTM TEST	INDUSTRY STANDARD	HERO VALUES
Length and width	ISO 10545.2	± 0.6%	± 0.1%
Thickness	ISO 10545.2	± 5%	± 5%
Linearity	ISO 10545.2	± 0.5% max	± 0.1%
Wedging	ISO 10545.2	± 0.5% max	± 0.1%
Warpage	ISO 10545.2	± 0.5% max	± 0.2%
Water absorption	ISO 10545.3	≤ 0.5%	≤ 0.06%
Modulus of rupture	ISO 10545.4	≥ 35 N/mm ²	49 N/mm ²
Breaking strength	ISO 10545.4	a) ≥ 7.5mm = ≥ 1300 N b) < 7.5mm = ≥ 700 N	Conforms
Coefficient of linear thermal expansion	ISO 10545.8	Test method available	6.5×10 ⁻⁶ °C ⁻¹
Frost resistance	ISO 10545.12	Must not produce noticeable alteration to surface	Conforms
Stain Resistance	ISO 10545.14	Test method available	Classifications for single items available on request
Color resistance to light	DIN 51094	Test method available	Unaffected surface
Friction coefficient	DIN 51130	Test method available	Classifications for single items available on request

V1

UNIFORM APPEARANCE
Differences among pieces from the same production run are minimal.

V2

SLIGHT VARIATION
Clearly distinguishable differences in texture and/or pattern with similar colors.

V3

MODERATE VARIATION
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.

V4

SUBSTANTIAL VARIATION
Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.

