





# **COLORS**





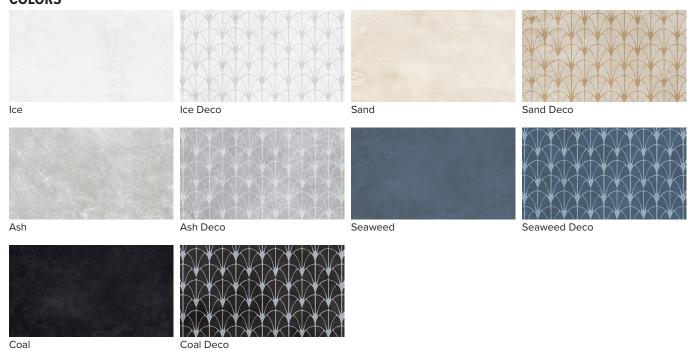

#### **SIZES**



## **MOSAICS & TRIM PIECES**

2"x2" on 12"x12" Sheet Mosaic 4"x4" on 12"x12" Sheet Mosaic 2"x12" on 12"x12" Sheet Mosaic 3"x24" Bullnose 6"x12" Cove Base

#### **SURFACES**

Thru Color Honed rectified Textured rectified

## **COLOR VARIATIONS**

V3

## **TECHNICAL INFORMATION**

SPECS	TEST	HERO VALUES
WATER ABSORPTION	C373	≤ 0.1%
THICKNESS DIMENSION	C499	≤ ±0.04 Inc.
FACIAL DIMENSION	C499	≤ ±0.25%
WARPAGE AVERAGE DIAGONAL	C485	≤ ±0.40%
WARPAGE AVERAGE EDGE	C485	≤ ±0.40%
WEDGING AVERAGE	C502	≤±0.25%
BOND STRENGTH	C482	≥ 200 psi
BREAKING STRENGTH	C648	≥ 400 lb.
HARDNESS (MOHS)	Scratch Test (Not Regulated)	≥7
VISIBLE ABRASION RESISTANCE FOR GLAZE TILES	C1027	Class 4
FROST RESISTANCE	C1026	No evidence of damage
CHEMICAL RESISTANCE	C650	Class A
STAIN RESISTANCE	C1378	Class A (apply honed finish)
DCOF HONED FINISH	BOT3000	≥ 0.45
DCOF TXT FINISH	BOT3000	≥ 0.65